

# 2700 Series Stainless Steel

**250**  lbs





## Excellent for:

- Hospitals
- Bacteria Free Environments
- Food Service Equipment
- Food processing Machinery
- Pharmaceutical Equipment
- Cart Wash Down Applications

## Options:

(Swivel only)

- "DLB" - Total Lock-Brake 
- "HO" - Bolt Hole (For Threaded Stems) 
- "EXP" - Expanding Adapters (consult CWBC)



**IP**  
-40° to 190°F  
55A +/-3  
Institutional Polyurethane



**IP-PB-TG**  
-40° to 190°F  
55A +/-3  
Institutional Polyurethane  
w/Precision Bearing and  
Thread Guard



**IR**  
-40° to 185°F  
75A +/-3  
Institutional TPE



**ELN**  
-31° to 248°F  
75D +/-3  
Nylon

## Finish:

- Stainless Steel

## Fitting Codes & Dimensions:


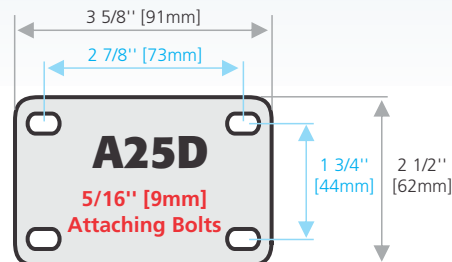


Plate thickness: 5/64" [3mm]



**"1/2HOLE"**  
1/2" [12.7mm] Bolt Hole

# 2700 Series Stainless Steel 250

| Size  | Swivel  | Rigid   | Wheel Material  | Wheel Colour  | Wheel Diameter   | Tread Width   | Capacity  | Overall Height  | Sw Lead   |
|---|---|---|---|---|--|---|---|---|---|
|  |  |  |  |  |  |  |  |  |  |
| 3"  | S2703-***-IP  | R2703-A25D-IP   | PU  | Grey  | 75mm   | 28mm  | 175 lbs   | 4 5/32"   | 32mm  |
| 3"  | S2703-***-IP-PB-TG  | R2703-A25D-IP-PB-TG   | PU  | Grey  | 75mm   | 28mm  | 175 lbs   | 4 5/32"   | 32mm  |
| 3"  | S2703-***-ELN   | R2703-A25D-ELN  | Nylon   | White   | 75mm   | 28mm  | 195 lbs   | 4 5/32"   | 32mm  |
| 4"  | S2704-***-IP  | R2704-A25D-IP   | PU  | Grey  | 100mm  | 30mm  | 220 lbs   | 5 3/16"   | 34mm  |
| 4"  | S2704-***-IP-PB-TG  | R2704-A25D-IP-PB-TG   | PU  | Grey  | 100mm  | 30mm  | 220 lbs   | 5 3/16"   | 34mm  |
| 4"  | S2704-***-ELN   | R2704-A25D-ELN  | Nylon   | White   | 100mm  | 30mm  | 250 lbs   | 5 3/16"   | 34mm  |
| 4"  | S2704-***-IR-PB-TG  | R2704-A25D-IR-PB-TG   | TPE   | Grey  | 100mm  | 31mm  | 165 lbs   | 5 3/16"   | 34mm  |
| 5"  | S2705-***-IP  | R2705-A25D-IP   | PU  | Grey  | 125mm  | 30mm  | 250 lbs   | 6 1/4"  | 36mm  |
| 5"  | S2705-***-IP-PB-TG  | R2705-A25D-IP-PB-TG   | PU  | Grey  | 125mm  | 30mm  | 250 lbs   | 6 1/4"  | 36mm  |
| 5"  | S2705-***-ELN   | R2705-A25D-ELN  | Nylon   | White   | 125mm  | 30mm  | 250 lbs   | 6 1/4"  | 36mm  |
| 5"  | S2705-***-IR-PB-TG  | R2705-A25D-IR-PB-TG   | TPE   | Grey  | 125mm  | 31mm  | 175 lbs   | 6 1/4"  | 36mm  |

\*\*\* - Include fitting code into Swivel Part Number (Plate, Bolt Hole or Stem code)



### EXPANDABLE ROUND STEMS

| ***               | DIAMETER | LENGTH | TYPE   |
|-------------------|----------|--------|--------|
| <b>3/4RDEXP</b>   | 3/4"     | 3 1/8" | Rubber |
| <b>7/8RDEXP</b>   | 7/8"     | 3 1/8" | Rubber |
| <b>1RDEXP</b>     | 1"       | 4 1/8" | Rubber |
| <b>1 1/8RDEXP</b> | 1 1/8"   | 4 1/8" | Rubber |
| <b>1 3/8RDEXP</b> | 1 3/8"   | 4 1/8" | Rubber |
| <b>1 1/2RDEXP</b> | 1 1/2"   | 4 1/8" | Rubber |



### EXPANDABLE SQUARE STEMS

| ***               | DIAMETER | LENGTH | TYPE   |
|-------------------|----------|--------|--------|
| <b>3/4SQEXP</b>   | 3/4"     | 3 1/8" | Rubber |
| <b>7/8SQEXP</b>   | 7/8"     | 3 1/8" | Rubber |
| <b>1SQEXP</b>     | 1"       | 4 1/8" | Rubber |
| <b>1 1/8SQEXP</b> | 1 1/8"   | 4 1/8" | Rubber |
| <b>1 3/8SQEXP</b> | 1 3/8"   | 4 1/8" | Rubber |
| <b>1 1/2SQEXP</b> | 1 1/2"   | 4 1/8" | Rubber |



### SPECIAL THREADED STEMS

| ***                      | DIAMETER | LENGTH |
|--------------------------|----------|--------|
| <b>3/8-**X length HO</b> | 3/8"     | ANY    |
| <b>1/2-**X length HO</b> | 1/2"     | ANY    |