

2700 SERIES

STAINLESS STEEL

250 LBS



IP
-40° to 190°F
55A +/-3



IP-PB-TG
-40° to 190°F
55A +/-3



IR-PB-TG
-40° to 185°F
75A +/-3



NY
-31° to 248°F
75D +/-3



*** - Include fitting code into Swivel Part Number (Plate, Bolt Hole or Stem code)

ATTACHMENT OPTIONS

TOP PLATE OPTION


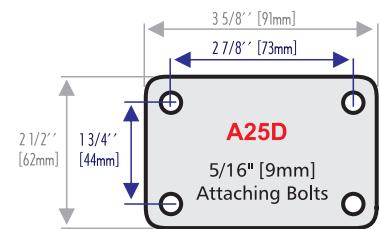


Plate thickness: 5/64" [3mm]

BOLT HOLE OPTION



STEMS

CODE ↑ DIA. ↑ Length

THREADED BOLT STEM OPTION

	3/8 **X Length HO	3/8"	ANY
	1/2 **X Length HO	1/2"	ANY

ROUND RUBBER EXPANDABLE ADAPTER

	3/4RD EXP	3/4"	3 1/8"
	7/8RD EXP	7/8"	3 1/8"
	1RD EXP	1"	4 1/8"
	1 1/8RD EXP	1 1/8"	4 1/8"
	1 3/8RD EXP	1 3/8"	4 1/8"
	1 1/2RD EXP	1 1/2"	4 1/8"

SQUARE RUBBER EXPANDABLE ADAPTER

	3/4SQ EXP	3/4"	3 1/8"
	7/8SQ EXP	7/8"	3 1/8"
	1SQ EXP	1"	4 1/8"
	1 1/8SQ EXP	1 1/8"	4 1/8"
	1 3/8SQ EXP	1 3/8"	4 1/8"
	1 1/2SQ EXP	1 1/2"	4 1/8"

PART NUMBER

Size	Tread Width	Material	Bearing Type	Capacity LBS	Overall Height	Swivel Lead	Swivel	Rigid
3"	28mm	PU	Ball	175	108mm	32mm	S2703-***-IP	R2703-A25D-IP
	28mm	PU	Ball	175	108mm	32mm	S2703-***-IP-PB-TG	R2703-A25D-IP-PB-TG
	28mm	NY	Ball	195	108mm	32mm	S2703-***-NY	R2703-A25D-NY
4"	30mm	PU	Ball	220	133mm	34mm	S2704-***-IP	R2704-A25D-IP
	30mm	PU	Ball	220	133mm	34mm	S2704-***-IP-PB-TG	R2704-A25D-IP-PB-TG
	30mm	NY	Ball	250	133mm	34mm	S2704-***-NY	R2704-A25D-NY
	31mm	TPE	Ball	165	133mm	34mm	S2704-***-IR-PB-TG	R2704-A25D-IR-PB-TG
5"	30mm	PU	Ball	250	160mm	36mm	S2705-***-IP	R2705-A25D-IP
	30mm	PU	Ball	250	160mm	36mm	S2705-***-IP-PB-TG	R2705-A25D-IP-PB-TG
	30mm	NY	Ball	250	160mm	36mm	S2705-***-NY	R2705-A25D-NY
	31mm	TPE	Ball	175	160mm	36mm	S2705-***-IR-PB-TG	R2705-A25D-IR-PB-TG

OPTIONS:

- "DLB" - Total-Lock Brake

FINISH:

- Stainless Steel (Electro-polished)



EXCELLENT FOR:

- Hospitals
- Bacteria Free Environments
- Food Service Equipment
- Food processing Machinery
- Pharmaceutical Equipment
- Cart Wash Down Applications