

0500 SERIES

85 LBS



PU-PB
-40° to 194°F
95A +/-3



ELN-PB
-31° to 248°F
95A +/-3



TPE-PB
-40 to 180F
75A +/-3



PART NUMBER

Size	Tread Width	Material	Bearing Type	Capacity LBS	Overall Height	Swivel Lead	Swivel	Rigid
1.5"	20mm	PU	Ball	75	60mm	24mm	S05015-***-PU-PB	R0515-A13C-PU-PB
	20mm	TPE	Ball	75	60mm	24mm	S05015-***-TPE-PB	R0515-A13C-TPE-PB
2"	20mm	PU	Ball	85	70mm	19mm	S0502-***-PU-PB	R0502-A13C-PU-PB
	20mm	ELN	Ball	85	70mm	19mm	S0502-***-ELN-PB	R0502-A13C-ELN-PB
	20mm	TPE	Ball	85	70mm	19mm	S0502-***-TPE-PB	R0502-A13C-TPE-PB

*** - Include fitting code into Swivel Part Number (Plate, Bolt Hole or Stem code)

ATTACHMENT OPTIONS

TOP PLATE OPTION

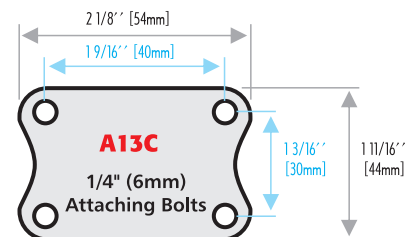


Plate thickness: 5/64" [2mm]

STEMS

CODE	DIA.	Length
THREADED STEM FITTING		
3/8-16X 1 1/2HN	3/8"	1 1/2"
* Please note for threaded stem option add 1.5mm to overall height.		
FRICION RING STEEL STEM OPTION		
437S X 1 3/8	7/16"	1 3/8"

OPTIONS:

- "DLB" - Total-Lock Brake

FINISH:

- Bright Zinc
- Stainless Steel Available*

* Consult CasterWorld for MOQ



EXCELLENT FOR:

- Office Furniture
- Institutional Equipment & Environments
- Food Service Carts and Fixtures
- Store Fixtures & Displays
- Audio & Visual Equipment