

## 7800 SERIES

## 2000 LBS



**NYHD**  
-30° to 248°F  
75D +/-3



**UR**  
-40° to 194°F  
95A +/-3



**SSC**  
-44° to 180°F (Standard)  
Consult CWBC for temperatures to 800°F  
95-98 Shore D



**PLY**  
-40° to 194°F  
95A +/-3



\*\*\* - Include fitting code into Swivel Part Number (Plate, Bolt Hole or Stem code)

### PART NUMBER

Size	Tread Width	Material	Bearing Type	Capacity LBS	Overall Height	Swivel Lead	Swivel	Rigid
5"	2"	NYHD	Ball	1600	169mm	41mm	S7805-A38H-NYHD-BB	R7805-A38H-NYHD-BB
	2"	UR	Ball	1400	169mm	41mm	S7805-A38H-UR-BB	R7805-A38H-UR-BB
	2"	PLY	Ball	800	169mm	41mm	S7805-A38H-PLY-BB	R7805-A38H-PLY-BB
6"	2"	NYHD	Ball	1700	194mm	49mm	S7806-A38J-NYHD-BB	R7806-A38J-NYHD-BB
	2"	UR	Ball	1500	194mm	49mm	S7806-A38J-UR-BB	R7806-A38J-UR-BB
	1 7/8"	Cast Iron	Ball	1900	194mm	49mm	S7806-A38J-SSC-BB	R7806-A38J-SSC-BB
	2"	PLY	Ball	900	194mm	49mm	S7806-A38J-PLY-BB	R7806-A38J-PLY-BB
8"	2"	NYHD	Ball	1800	244mm	47mm	S7808-A38J-NYHD-BB	R7808-A38J-NYHD-BB
	2"	UR	Ball	1600	244mm	47mm	S7808-A38J-UR-BB	R7808-A38J-UR-BB
	1 7/8"	Cast Iron	Ball	2000	244mm	47mm	S7808-A38J-SSC-BB	R7808-A38J-SSC-BB
	2"	PLY	Ball	950	244mm	47mm	S7808-A38J-PLY-BB	R7808-A38J-PLY-BB

### ATTACHMENT OPTIONS

#### TOP PLATE OPTION

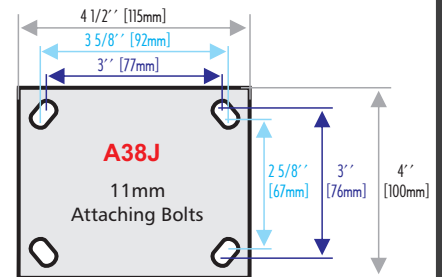


Plate thickness: 3/8" [9.5mm]

### OPTIONS

#### OPTIONS: (swivel only)

- "PCB"  
- Positive Cam Brake

#### FINISH:

- Bright Zinc



### EXCELLENT FOR:

- Abusive Conditions
- Industrial Platform Trucks
- Most Hardworking Industrial Functions
- Tow Lines
- Heavy Waste Bin Applications
- Economic Choice for heavy loads