



# 0600 SERIES

# 75LBS



## FEATURES

**KINGPIN:** 5/16" rivet  
**RACEWAY:** 3/16" diameter single race; hardened steel load bearings  
**BUSHING:** Nylon  
**AXLE&NUT:** 1/4" riveted axle  
**FINISH:** Bright chrome

**HARDENED:** Washers  
**SPECIAL:** Only the highest quality of bright cold rolled steel is used. 602 & 652 Series are BIFMA approved. For BIFMA approved casters, please specify.  
**LEG SPACING:** 0602 - 1 3/4", 0652 - 2"

## EXCELLENT FOR:

- Office furniture
- Institutional equipment
- Hospital environment



ENVIROTHANE™



ENVIROTHANE™ GREY



POLYOLEFIN

## OPTIONS:

- SLB Side Locking Brake (for S0652 only)  
 HT Heat Treated Yoke (for S0652 only)

WHEEL		CASTER			PART NUMBER			Caster Weight (lbs)
Diameter	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel		
1 3/4"	75	Ball	1 13/16"	2 1/2"	Polyolefin	S0602-***-PO	0.44	
	75	Ball			Envirothane™	S0602-***-U	0.44	
	75	Ball			Envirothane™ Grey	S0602-***-UG	0.44	
2"	75	Ball	1 7/8"	2 3/4"	Polyolefin	S0652-***-PO	0.46	
	75	Ball			Envirothane™	S0652-***-U	0.51	
	75	Ball			Envirothane™ Grey	S0652-***-UG	0.51	

\* Caster weight and OH based on Plate  
 \* See stem options for overall height (OH) differences

## FINISHES:

- 6?AB Antique Brass  
 6?AC Antique Copper  
 6?4F Black Flat  
 6?4G Black Gloss  
 6?4I Black Ionic  
 6?1 Brass Lacquer  
 6?BN Brush Nickel  
 6?2 Chrome  
 Inquiries on other finishes welcome



## SPECIAL:

Urethane wheels are hard enough for carpeted floors and soft enough for tiled floors



BIFMA approved



## PLATE DIAGRAMS

STANDARD PLATE: **A12D**

Plate Thickness: 3/32"

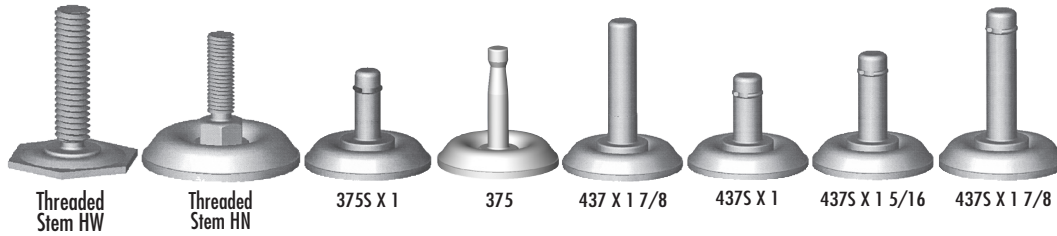

### THREADED STEMS HEX WASHER -.0937" [2.38mm] To Std OH

***	DIAMETER	LENGTH	TYPE
5/16-18X13/16HW	5/16"	13/16"	NC
5/16-18X1HW	5/16"	1"	NC
3/8-16X1/2HW	3/8"	1/2"	NC
3/8-16X3/4HW	3/8"	3/4"	NC
3/8-16X1HW	3/8"	1"	NC
3/8-16X1 1/2HW	3/8"	1 1/2"	NC

### THREADED STEMS HEX NUT +.1562" [3.97mm] To Std OH

***	DIAMETER	LENGTH	TYPE
5/16-18X3/4HN	5/16"	3/4"	NC
5/16-18X1HN	5/16"	1"	NC
3/8-16X5/8HN	3/8"	5/8"	NC
3/8-16X1HN	3/8"	1"	NC
3/8-16X1 1/2HN	3/8"	1 1/2"	NC

### ROUND STEMS -.0937" [2.38mm] To Std OH

***	DIAMETER	LENGTH	TYPE
375SX1	3/8"	1"	Friction Ring
375	5/16"	1 9/16"	Grip Neck
437X1 7/8	7/16"	1 7/8"	Plain
437SX1	7/16"	1"	Friction Ring
437SX1 5/16	7/16"	1 5/16"	Friction Ring
437SX1 7/8	7/16"	1 7/8"	Friction Ring

