



0800 SERIES

Available
in
Stainless Steel
(see 0809 series)

125LBS



FEATURES

KINGPIN: 5/16" rivet
RACEWAY: 3/16" diameter single race;
hardened steel load bearings
BUSHING: Nylon, precision, steel or ball bearings
AXLE&NUT: 1/4" riveted axle

FINISH: Corrosion resistant bright zinc finish
HARDENED: Yoke and washers
SPECIAL: Wide selection of specialty stems and plates
LEG SPACING: 1"



EXCELLENT FOR:

- Office furniture
- Institutional equipment
- Hospital environment

OPTIONS:

- iLKW** Wheel Only iLock (2" and 3" swivel only, not offered for 3" ICE wheel)
- TLB** Top Locking Brake (3" swivel only)
- SLB** Side Locking Brake (SLB will not work with BB or PB) (SLB not available with 2" Rigid)
- AN** Axle and Nut
- C** Raceway Seal (not avail. w/HW)
- BB** Ball Bearings (2" and 2 1/2" Urethane Tapered Wheel Only)
- PB** Precision Bearing (ICE, 3" ProTech Crown, & 3" Purthane Wheels Only)
- TG** Thread Guards (2 1/2" and 3")

FINISHES:

- 08?AB Antique Brass
- 08?AC Antique Copper
- 08?4F Black Flat
- 08?4G Black Gloss
- 08?4I Black Ionic
- 08?1 Brass Lacquer
- 08?BN Brush Nickel
- 08?2 Chrome
- Inquiries on other finishes welcome

SPECIAL:

Urethane wheels are hard enough for carpeted floors and soft enough for tiled floors

WHEEL

CASTER

PART NUMBER

Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)
2"	9/16"	125	Nylon	1 3/4"	2 5/8"	Envirothane™ Tapered	S0803-***-UT	0.38	R0803-***-UT	0.27
		125	Ball			Envirothane™ Tapered BB	S0803-***-UT-BB	0.51	R0803-***-UT-BB	0.40
	7/8"	75	Plain	1 3/4"	2 5/8"	ProTech™ Flat	S0803-***-PROF	0.35	R0803-***-PROF	0.25
		80	Steel			Conductive Soft Rubber	S0803-***-CSR	0.41	R0803-***-CSR	0.30
		80	Precision			ICE™	S0803-***-ICE-PB	0.45	R0803-***-ICE-PB	0.35
		80	Steel			Soft Rubber	S0803-***-SR	0.41	R0803-***-SR	0.30
		80	Steel			Soft Rubber Grey	S0803-***-SRG	0.41	R0803-***-SRG	0.30
		125	Plain			Polyolefin	S0803-***-PO	0.34	R0803-***-PO	0.24
		125	Plain			Semi Steel	S0803-***-ST	0.79	R0803-***-ST	0.68
		125	Nylon			Envirothane™	S0803-***-U	0.41	R0803-***-U	0.30
		125	Nylon			Envirothane™ Grey	S0803-***-UG	0.41	R0803-***-UG	0.30
2 1/2"	9/16"	125	Nylon	2 1/8"	3 3/16"	Envirothane™ Tapered	S0823-***-UT	0.47	R0823-***-UT	0.37
		125	Ball			Envirothane™ Tapered BB	S0823-***-UT-BB	0.58	R0823-***-UT-BB	0.48
	7/8"	75	Plain	2 1/8"	3 3/16"	ProTech™ Flat	S0823-***-PROF	0.41	R0823-***-PROF	0.31
		80	Nylon			Conductive Soft Rubber	S0823-***-CSR	0.51	R0823-***-CSR	0.41
		80	Precision			ICE™	S0823-***-ICE-PB	0.47	R0823-***-ICE-PB	0.37
		80	Nylon			Soft Rubber	S0823-***-SR	0.51	R0823-***-SR	0.41
		125	Plain			Polyolefin	S0823-***-PO	0.51	R0823-***-PO	0.32
		125	Nylon			Envirothane™	S0823-***-U	0.46	R0823-***-U	0.36
		125	Nylon			Envirothane™ Grey	S0823-***-UG	0.46	R0823-***-UG	0.36
	7/8"	75	Precision	2 3/8"	3 11/16"	ProTech™ Black Crown - PB	S0833-***-PROBL-PB-TG	0.55	R0833-***-PROBL-PB-TG	0.43
		75	Plain			ProTech™ Flat	S0833-***-PROF	0.48	R0833-***-PROF	0.36
		100	Steel			Conductive Soft Rubber	S0833-***-CSR	0.62	R0833-***-CSR	0.50
		100	Precision			ICE™	S0833-***-ICE-PB	0.59	R0833-***-ICE-PB	0.47
		100	Steel			Soft Rubber	S0833-***-SR	0.62	R0833-***-SR	0.50
		100	Steel			Soft Rubber Grey	S0833-***-SRG	0.62	R0833-***-SRG	0.50
		125	Plain			Polyolefin	S0833-***-PO	0.48	R0833-***-PO	0.36
		125	Precision			Purthane™	S0833-***-PTN-PB-TG	0.79	R0833-***-PTN-PB-TG	0.67
3"	7/8"	125	Nylon			Envirothane™	S0833-***-U	0.54	R0833-***-U	0.42
		125	Nylon			Envirothane™ Grey	S0833-***-UG	0.54	R0833-***-UG	0.42

* Caster weight and OH based on Plate

* See stem options for overall height (OH) differences








BIFMA approved



STANDARD PLATE: A17D

Plate Thickness: 3/32"

PLATE DIAGRAMS

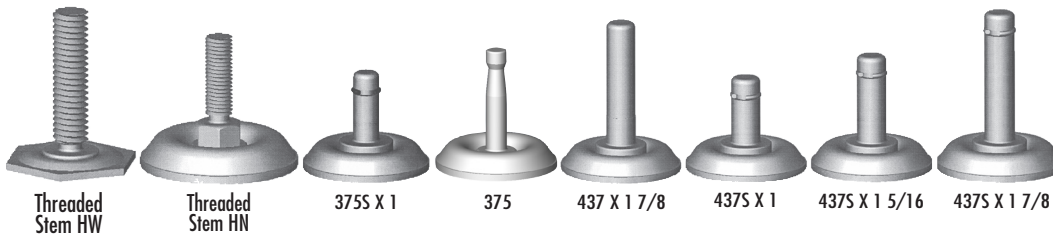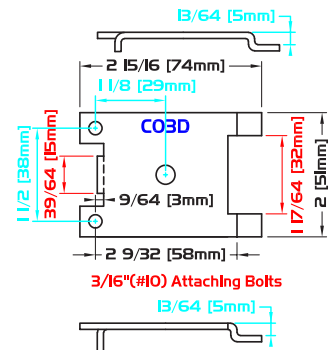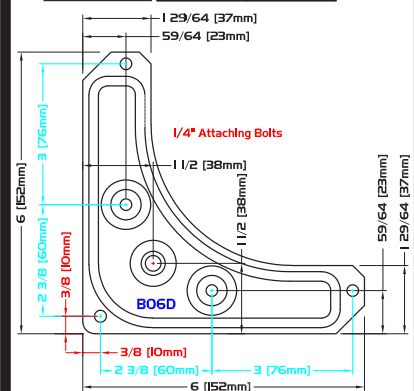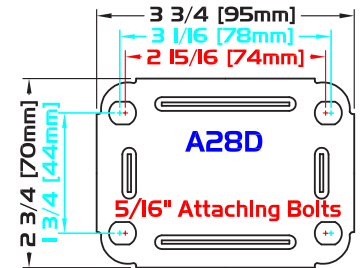

THREADED STEMS HEX WASHER

-0.203" [5.156mm] To Std OH

***	DIAMETER	LENGTH	TYPE
5/16-18X13/16HW	5/16"	13/16"	NC
5/16-18X1HW	5/16"	1"	NC
3/8-16X1/2HW	3/8"	1/2"	NC
3/8-16X3/4HW	3/8"	3/4"	NC
3/8-16X1HW	3/8"	1"	NC
3/8-16X1 1/2HW	3/8"	1 1/2"	NC

THREADED STEMS HEX NUT

+0.031" [0.78mm] To Std OH

***	DIAMETER	LENGTH	TYPE
5/16-18X3/4HN	5/16"	3/4"	NC
5/16-18X1HN	5/16"	1"	NC
3/8-16X5/8HN	3/8"	5/8"	NC
3/8-16X1HN	3/8"	1"	NC
3/8-16X1 1/2HN	3/8"	1 1/2"	NC

ICE WHEEL COLOURS

+Actual colours may vary

COLOUR	PART NUMBER	SIZE AVAILABILITY
CLEAR	ICE	2" * 2 5/16" * 3"
BLUE	ICEB	2" * 2 5/16" * 3"
BLACK	ICEBL	2"
GREEN*	ICEG*	2" * 2 5/16" * 3"
ORANGE*	ICEO*	3"
PURPLE*	ICEP*	3"
PINK	ICEPI	3"
RED*	ICER*	2" * 2 5/16" * 3"

ROUND STEMS

-0.203" [5.156mm] To Std OH

***	DIAMETER	LENGTH	TYPE
375SX1	3/8"	1"	Friction Ring
375	5/16"	1 9/16"	Grip Neck
437X1 7/8	7/16"	1 7/8"	Plain
437SX1	7/16"	1"	Friction Ring
437SX1 5/16	7/16"	1 5/16"	Friction Ring
437SX1 7/8	7/16"	1 7/8"	Friction Ring

* Custom order run 2,500 pieces minimum. Call for availability



iLKW, Wheel iLock available with 2" and 3" wheels.
iLKW not offered for 3" ICE wheel