

## 6700 SERIES

## 900 LBS



PH  
-50° to 250°F  
102 Rockwell E



MPUG  
-30° to 180°F  
95A +/-5



EZC  
-50° to 180°F  
65A +/-5



EZ  
-50° to 180°F  
65A +/-5



TLB

### ATTACHMENT OPTIONS

#### TOP PLATE OPTION

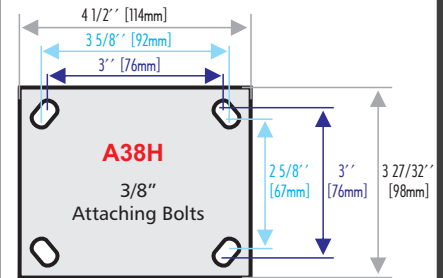



Plate thickness: 3/8" [9.5mm]

#### OPTIONS

##### OPTIONS:

- "4PSL" Field Mountable 4 Position Swivel Lock 
- "TLB" Top Locking Wheel brake
- "TG" Thread Guards
- "C" Head Seals in swivel selection

**FINISH:** Bright Zinc

#### BEARING OPTIONS

- Roller Bearing (Standard) "RB" 
- Caged Roller change "RB" to "RBC" 
- Caged Ball "RB" to "PBC" 
- Dual Ball "RB" to "BB" 
- Delrin "RB" to "DB" 

### PART NUMBER

Size	Tread Width	Material	Bearing Type	Capacity LBS	Overall Height	Swivel Radius	Swivel	Rigid
4"	2"	PH	Roller	700	5 5/8"	3 9/16"	S6704-A38H-PH-RB	R6704-A38H-PH-RB
	2"	EZ	Roller	350	5 5/8"	3 9/16"	S6704-A38H-EZ-RB	R6704-A38H-EZ-RB
	2"	EZC	Roller	250	5 5/8"	3 9/16"	S6704-A38H-EZC-RB	R6704-A38H-EZC-RB
	2"	MPUG	Roller	600	5 5/8"	3 9/16"	S6704-A38H-MPUG-RB	R6704-A38H-MPUG-RB
5"	2"	PH	Roller	900	6 1/2"	4 1/4"	S6705-A38H-PH-RB	R6705-A38H-PH-RB
	2"	EZ	Roller	375	6 1/2"	4 1/4"	S6705-A38H-EZ-RB	R6705-A38H-EZ-RB
	2"	EZC	Roller	300	6 1/2"	4 1/4"	S6705-A38H-EZC-RB	R6705-A38H-EZC-RB
	2"	MPUG	Roller	700	6 1/2"	4 1/4"	S6705-A38H-MPUG-RB	R6705-A38H-MPUG-RB
6"	2"	PH	Roller	900	7 1/2"	5"	S6706-A38H-PH-RB	R6706-A38H-PH-RB
	2"	EZ	Roller	600	7 1/2"	5"	S6706-A38H-EZ-RB	R6706-A38H-EZ-RB
	2"	EZC	Roller	450	7 1/2"	5"	S6706-A38H-EZC-RB	R6706-A38H-EZC-RB
	2"	MPUG	Roller	800	7 1/2"	5"	S6706-A38H-MPUG-RB	R6706-A38H-MPUG-RB
8"	2"	PH	Roller	900	9 1/2"	6 1/2"	S6708-A38H-PH-RB	R6708-A38H-PH-RB
	2"	EZ	Roller	675	9 1/2"	6 1/2"	S6708-A38H-EZ-RB	R6708-A38H-EZ-RB
	2"	EZC	Roller	500	9 1/2"	6 1/2"	S6708-A38H-EZC-RB	R6708-A38H-EZC-RB
	2"	MPUG	Roller	900	9 1/2"	6 1/2"	S6708-A38H-MPUG-RB	R6708-A38H-MPUG-RB