

FEATURES

ALGOOD

KINGPIN: 1" or 1 1/4" integrally machined forged Kingpin
MATERIAL: SAE 1045 hot forged
RACEWAY: 1/2" diameter Ball raceway or Precision load upper ball race
BUSHING: Tapered Roller thrust bearings
AXLE&NUT: 1" or 1 1/4" axle
FINISH: Black or blue industrial enamel paint
HARDENED: Flame hardened raceway
LEGS: Continuously welded for added strength
LEG SPACING: 3 1/2", 4 1/2", 5 1/2"



EXCELLENT FOR

- Abusive conditions
- Tow lines
- Heavy service equipment
- Aircraft engine stands
- Ground support equipment
- Portable dollies
- Die & tooling fixtures

OPTIONS

- TSB Thumb Screw Brake
- UWB Universal Wheel Brake
- 4PSL 4 Position Swivel Lock
- RB Roller Bearing
- TB Tapered Bearing
- Z Zerk Axle

FINISHES

Black or Blue




WHEEL		CASTER				PART NUMBER					
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)	
6"	3"	1,500	Tapered	5 1/2"	9"	Moldon Rubber - TB	S9806-A64L-MRR-TB	44.00	R9806-A65L-MRR-TB	44.00	
		4,000	Tapered			Moldon Urethane - TB	S9806-A64L-URR-TB	44.00	R9806-A65L-URR-TB	44.00	
		4,800	Tapered			HD Moldon Urethane - TB	S9806-A64L-URH-TB	44.00	R9806-A65L-URH-TB	44.00	
		5,000	Tapered			Forged Steel - TB	S9806-A64L-FSR-TB	65.00	R9806-A65L-FSR-TB	65.00	
		5,000	Tapered			Solid Steel - TB	S9806-A64L-SSR-TB	46.50	R9806-A65L-SSR-TB	46.50	
		17,000	Tapered			HD Forged Steel - TB	S9806-A84M-FSH-TB	87.00	R9806-A84M-FSH-TB	87.00	
	17,000	Tapered	Forged Steel - TB	S9806-A84M-FSR-TB	85.00	R9806-A84M-FSR-TB	85.00				
	5"	7,400	Tapered	5 1/2"	9"	Moldon Urethane - TB	S9865-A84M-URR-TB	90.00	R9865-A84M-URR-TB	90.00	
		8,800	Tapered			HD Moldon Urethane - TB	S9865-A84M-URH-TB	90.00	R9865-A84M-URH-TB	90.00	
	8"	3"	1,700	Tapered	6 1/2"	11"	Moldon Rubber - TB	S9808-A64L-MRR-TB	54.00	R9808-A65L-MRR-TB	54.00
1,700			Tapered	Moldon Rubber - TB			S9808-A84M-MRR-TB	79.00	R9808-A84M-MRR-TB	79.00	
5,000			Tapered	Solid Steel - TB			S9808-A64L-SSR-TB	62.00	R9808-A65L-SSR-TB	62.00	
5,000			Tapered	HD Moldon Urethane - TB			S9808-A64L-URH-TB	55.00	R9808-A65L-URH-TB	55.00	
5,000			Tapered	Moldon Urethane - TB			S9808-A64L-URR-TB	55.00	R9808-A65L-URR-TB	55.00	
6,200			Tapered	Moldon Urethane - TB			S9808-A84M-URR-TB	80.00	R9808-A84M-URR-TB	80.00	
7,400		Tapered	HD Moldon Urethane - TB	S9808-A84M-URH-TB	80.00	R9808-A84M-URH-TB	80.00				
10,000		Tapered	Forged Steel - TB	S9808-A64L-FSR-TB	62.00	R9808-A65L-FSR-TB	62.00				
4"		7,600	Tapered	6 1/2"	11"	Moldon Urethane - TB	S9884-A84M-URR-TB	75.00	R9884-A84M-URR-TB	75.00	
		9,000	Tapered			HD Moldon Urethane - TB	S9884-A84M-URH-TB	75.00	R9884-A84M-URH-TB	75.00	
10"	3"	2,000	Tapered	7 1/2"	13"	Moldon Rubber - TB	S9810-A64L-MRR-TB	70.00	R9810-A65L-MRR-TB	70.00	
		7,000	Tapered			Solid Steel - TB	S9810-A64L-SSR-RB	71.00	R9810-A65L-SSR-RB	71.00	
		7,000	Tapered			Solid Steel - TB	S9810-A84M-SSR-TB	92.00	R9810-A84M-SSR-TB	92.00	
		7,400	Tapered			Moldon Urethane - TB	S9810-A64L-URR-TB	77.00	R9810-A65L-URR-TB	77.00	
		7,400	Tapered			Moldon Urethane - TB	S9810-A84M-URR-TB	88.00	R9810-A84M-URR-TB	88.00	
		8,800	Tapered			HD Moldon Urethane - TB	S9810-A64L-URH-TB	77.00	R9810-A65L-URH-TB	77.00	
	8,800	Tapered	Moldon Urethane - TB	S9810-A84M-URH-TB	88.00	R9810-A84M-URH-TB	88.00				
	10,000	Tapered	HD Forged Steel - TB	S9810-A64L-FSH-TB	81.00	R9810-A65L-FSH-TB	81.00				
	10,000	Tapered	Forged Steel - TB	S9810-A64L-FSR-TB	81.00	R9810-A65L-FSR-TB	81.00				
	13,000	Tapered	HD Forged Steel - TB	S9810-A84M-FSH-TB	90.00	R9810-A84M-FSH-TB	90.00				
4"	3,000	Tapered	7 1/2"	13"	Moldon Rubber - TB	S98104-A84M-MRR-TB	103.00	R98104-A84M-MRR-TB	103.00		
	10,000	Tapered			Moldon Urethane - TB	S98104-A84M-URR-TB	103.00	R98104-A84M-URR-TB	103.00		
	12,000	Tapered			Solid Steel - TB	S98104-A84M-SSR-TB	102.00	R98104-A84M-SSR-TB	102.00		
	12,000	Tapered			HD Moldon Urethane - TB	S98104-A84M-URH-TB	103.00	R98104-A84M-URH-TB	103.00		
	17,000	Tapered			HD Forged Steel - TB	S98104-A84M-FSH-TB	140.00	R98104-A84M-FSH-TB	140.00		
	17,000	Tapered			Forged Steel - TB	S98104-A84M-FSR-TB	140.00	R98104-A84M-FSR-TB	140.00		
5"	12,000	Tapered	7 1/2"	13"	Moldon Urethane - TB	S98105-A84M-URR-TB	103.00	R98105-A84M-URR-TB	103.00		
	14,400	Tapered			HD Moldon Urethane - TB	S98105-A84M-URH-TB	103.00	R98105-A84M-URH-TB	103.00		

PLATE DIAGRAMS

Standard Plate: A84M
Standard Plate: A64L
Standard Plate: A65L

Plate Thickness: 5/8"



WHEEL			CASTER			PART NUMBER					
Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)	
12"	3"	7,600	Tapered	8 1/2"	15 1/2"	Moldon Urethane - TB	S9812-A84M-URR-TB	108.00	R9812-A84M-URR-TB	108.00	
		9,200	Tapered			HD Moldon Urethane - TB	S9812-A84M-URH-TB	108.00	R9812-A84M-URH-TB	108.00	
	4"	3,200	Tapered	8 1/2"	15 1/2"	Moldon Rubber - TB	S98124-A84M-MRR-TB	120.00	R98124-A84M-MRR-TB	120.00	
		11,000	Tapered			Moldon Urethane - TB	S98124-A84M-URR-TB	120.00	R98124-A84M-URR-TB	120.00	
		13,000	Tapered			HD Moldon Urethane - TB	S98124-A84M-URH-TB	120.00	R98124-A84M-URH-TB	120.00	
		15,000	Tapered			Ductile Iron - TB	S98124-A84M-DIR-TB	145.00	R98124-A84M-DIR-TB	145.00	
5"	13,000	Tapered	8 1/2"	15 1/2"	Moldon Urethane - TB	S98125-A84M-URR-TB	150.00	R98125-A84M-URR-TB	150.00		
	15,000	Tapered			HD Moldon Urethane - TB	S98125-A84M-URH-TB	150.00	R98125-A84M-URH-TB	150.00		
	17,000	Tapered			Ductile Iron - TB	S98125-A84M-DIR-TB	210.00	R98125-A84M-DIR-TB	210.00		
16"	5"	3,000	Tapered	12"	19"	Moldon Rubber - TB	S98165-A84M-MRR-TB	200.00	R98165-A84M-MRR-TB	200.00	
		16,000	Tapered			Moldon Urethane - TB	S98165-A84M-URR-TB	200.00	R98165-A84M-URR-TB	200.00	
		17,000	Tapered			HD Moldon Urethane - TB	S98165-A84M-URH-TB	200.00	R98165-A84M-URH-TB	200.00	
18"	5"	5,600	Tapered	13"	23"	Moldon Rubber - TB	S98185-A84M-MRR-TB	220.00	R98185-A84M-MRR-TB	220.00	
		17,000	Tapered			Moldon Urethane - TB	S98185-A84M-URR-TB	220.00	R98185-A84M-URR-TB	220.00	
		17,000	Tapered			HD Moldon Urethane - TB	S98185-A84M-URH-TB	220.00	R98185-A84M-URH-TB	220.00	

* Caster weight based on Standard Plate

Plate Thickness: 1/2"

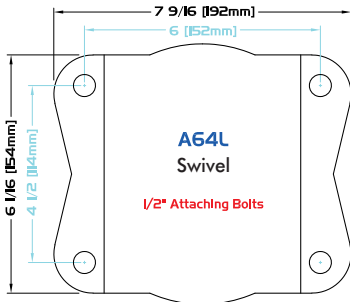


Plate Thickness: 1/2"

