




GO LOW'S

LOW PROFILE SERIES

2,000 LBS

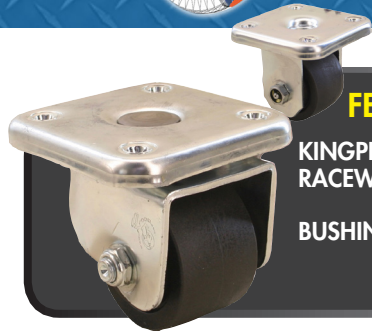

FEATURES

KINGPIN: 5/16" rivet, 9/16" rivet, 3/4" diameter heavy duty kingpin
RACEWAY: 3/16", 1/4", 5/16" diameter upper race; 1/4" diameter lower race (5400 series equal diameter raceway)
BUSHING: Roller bearing with drilled and hardened steel spanner bushing and side washers.

AXLE&NUT: 3/8", 1/2" zerk axle and lock nut (excluding PB), 5/16" axle and nut (8000), 12mm axle and lock nut for 2 5/8"
FINISH: Corrosion resistant bright zinc
HARDENED: Yoke and washers (5400), washers (6500 & 8000)
LEG SPACING: 1 3/4" (5400), 2 1/2" (6500)

EXCELLENT FOR:

- Appliances
- Store fixtures
- Computer equipment
- Metal equipment
- Business machines
- Food equipment
- Freezers
- Abusive application
- Floor protection & excellent mobility



PHENOLIC



POLYOLEFIN



POLYOLEFIN (PO)



PURTHANE™



ROLLX™ LAVA™



ROLLX™ WOW LAVA™ WOW



ROLLX™ WOW



ENVIROTHANE™



ENVIROTHANE™ GREY

WHEEL

CASTER

PART NUMBER

Diameter	Tread Width	Capacity Lbs.	Bearing Type	Swivel Radius	Overall Height	Wheel Type	Swivel	Caster Weight (lbs)	Rigid	Caster Weight (lbs)
1 1/2"	1 3/4"	220	Plain	1 1/2"	2 1/4"	Polyolefin	S8015-A27D-PO	0.78	Not Available	
1 3/4"	1 1/2"	800	Roller	2 49/64" (70mm)	2 31/64" (63mm)	RollX™	SGL175-B29F-RX-RB	2.22	Not Available	
2" Dual Wheel	7/8"	150	Plain	1 13/16"	2 7/8"	ProTech™ Flat	S8022-A27D-PROF	0.82	Not Available	
		160	Nylon			Soft Rubber	S8022-A27D-SR	1.10		
		200	Nylon			Hard Rubber	S8022-A27D-HR	1.10		
		200	Steel			Envirothane™	S8022-A27D-U	0.88		
		200	Steel			Envirothane™ Grey	S8022-A27D-UG	0.88		
2"	1 3/4"	200	Plain	1 13/16"	2 7/8"	Polyolefin	S8022-A27D-PO	0.84	Not Available	
2 3/8"	1 3/8"	1,750	Roller	2 1/2"	3 5/8"	RollX™-WOW	S65253-B29F-RXWX2-RB	4.55	Not Available	
2 5/8"	1 1/2"	350	Roller	2 9/16"	3 11/16"	Polyolefin	S54263-A38F-PO-RB*	2.03	R54263-A38F-PO-RB*	1.48
		400	Roller			Envirothane™	S54263-A38F-U-RB*	2.09	R54263-A38F-U-RB*	1.54
		400	Roller			Envirothane™ Grey - RB	S54263-A38F-UG-RB*	2.09	R54263-A38F-UG-RB*	1.54
		550	Roller			RollX™	S54263-A38F-RX-RB*	2.15	R54263-A38F-RX-RB*	1.60
		800	Roller			RollX™	SGL263-B29F-RX-RB	1.43	RGL263-B29F-RX-RB	0.43
3"	1 13/16"	600	Roller	2 5/16"	4 1/16"	Phenolic	S8030-A32F-PH-RB-TSB-Z	2.50	Not Available	
	1 1/2"	400	Roller			Polyolefin	S5433-A38F-PO-RB*	2.35	R5433-A38F-PO-RB*	1.97
		400	Roller			Phenolic	S5433-A38F-PH-RB*	2.58	R5433-A38F-PH-RB*	2.20
		500	Roller			Envirothane™	S5433-A38F-U-RB*	2.45	R5433-A38F-U-RB*	2.07
		500	Roller			Envirothane™ Grey	S5433-A38F-UG-RB*	2.45	R5433-A38F-UG-RB*	2.07
		600	Roller			Lava™	S5433-A38F-LV-RB*	2.50	R5433-A38F-LV-RB*	2.12
		600	Roller			Purthane™	S5433-A38F-PTN-PB*	3.07	R5433-A38F-PTN-PB*	2.69
		600	Precision Roller			RollX™	S5433-A38F-RX-RB*	2.50	R5433-A38F-RX-RB*	2.12
		650	Roller			RollX™	S5433-A38F-RX-RB*	2.50	R5433-A38F-RX-RB*	2.12
2"	1,200	Roller	RollX™-WOW	SE6533-A38H-RXW-RB*	4.41	RE6533-A38H-RXW-RB*	3.33			
2,000	Ball	RollX™-WOW	S6533-B29F-RXW-BB-13/16SL*	5.00	RE6533-B29F-RXW-BB*	3.13				

OPTIONS:

- iLK Directional & Wheel iLock (avail. w/ S5433)
- iLKW Wheel Only iLock (avail. w/ S5433)
- iLKS Swivel Only iLock (avail. w/ S5433)
- TLB Top Locking Brake (avail. w/ S5433)
- TSB Thumb Screw Brake (avail. w/S54263, 6533 S65253 & 8030)
- C Raceway Seal
- BB Ball Bearings
- DB Delrin Bearings
- DC Dust Cap for raceway (avail. w/ S5433)
- TG Thread Guards

FINISHES:

- 4F Black Flat
 - 4G Black Gloss
 - 4I Black Ionic
 - 2 Chrome
- Inquiries on other finishes welcome

SPECIAL:

- Non-marking
- High load capacity
- Large precision bearing

* NSF Certified Caster



NOT ALL COMPONENT

STANDARD 8022 PLATE:	A27D	D - Plate Thickness: 3/32"
STANDARD 8030 PLATE:	A32F	F - Plate Thickness: 5/32"
STANDARD 5400 PLATE:	A38F	F - Plate Thickness: 5/32"
STANDARD SE6500 PLATE:	A38H	H - Plate Thickness: 1/4"
STANDARD GL263 PLATE:	B29F	F - Plate Thickness: 5/32"

PLATE DIAGRAMS

