

85 LBS



PU-PB
- 40° TO 194°F
95A +/- 3



TPE-PB
- 40° TO 180°F
75A +/- 3



							PART NUMBER	
SIZE	TREAD WIDTH	MATERIAL	BEARING TYPE	CAPACITY (LBS)	OVERALL HEIGHT	SWIVEL LEAD	SWIVEL	RIGID
1.5"	20MM	PU	DOUBLE 608 BALL BEARINGS	75 LBS	60MM	24MM	SO5015-***-PU-PB	RO515-A13C-PU-PB
		TPE					SO5015-***-TPE-PB	RO515-A13C-TPE-PB
2"	20MM	PU	DOUBLE 608 BALL BEARINGS	85 LBS	70MM	19MM	SO502-***-PU-PB	RO502-A13C-PU-PB
		TPE					SO502-***-TPE-PB	RO502-A13C-TPE-PB

*** / *** - INCLUDE FITTING CODE INTO SWIVEL PART NUMBER (PLATE, BOLT HOLE, OR STEM CODE)

ATTACHMENT OPTIONS

OTHER SPECS/OPTIONS

"DLB"
TOTAL LOCK BRAKE



FINISH: BRIGHT ZINC
STAINLESS STEEL

CasterWorld

WIDE RANGE OF OTHER WHEEL MATERIALS AVAILABLE/CUSTOMIZABLE TO SUIT THIS SERIES CASTER. CONSULT CASTERWORLD FOR DETAILS

STEMS

THREADED STEM

CODE: 3/8-16X 1 1/2HN
DIA 3/8"
LENGTH: 1 1/2"
ADD 1.5MM TO OVERALL HEIGHT WHEN USING THIS OPTION



GRIP RING STEM

CODE: 437S X 1 3/8
DIA: 7/16"
LENGTH: 1 3/8"



TOP PLATE

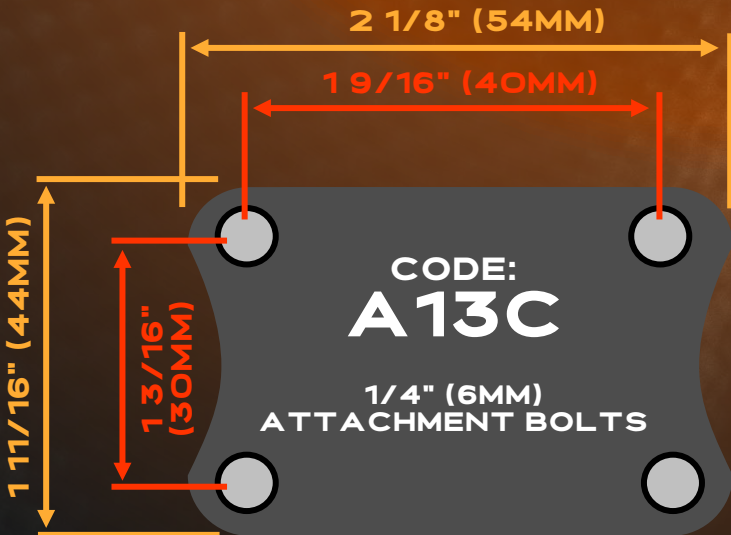


PLATE THICKNESS: 5/64" (2MM)

EXCELLENT FOR:

- OFFICE FURNITURE
- INSTITUTIONAL EQUIPMENT & ENVIRONMENTS
- FOOD SERVICE CARTS & FIXTURES
- STORE FIXTURES & DISPLAYS
- AUDIO & VISUAL EQUIPMENT